			CLUTCH KIT	COVER ASSEMBLY	DRIVEN PLATE	RELEASE BEARING
		Ø ins/mm				

WINCHESTER AUTOMOBILES

Taxi (Ford 1500 cc. petrol eng.)	68→	216	--	--	HB1330	--
Taxi (Ford 1700 cc. V4 petrol eng.)	68→	216	--	HE3499	HB1519	--

YUGOCARS ▲1

0.9, 1.1, 1.3 (28mm thick flywheel)	69→	180	--	HE1064	HB3950 HB8252●	HD2404
1.3 (31mm thick flywheel)	83-87	180	HK2809	HE1238	HB3950 HB8252●	HD2404

▲1 1300

FLYWHEEL CHANGE

Both 1100 and 1300 cc. engines now use the standard 1100 flywheel which has a thickness of 28 mm.

The superseded 1300 flywheel, which is 31 mm thick, was fitted on most 513 models produced between 1983 and 1987. Because of the difference in flywheel thickness it is most important that the correct clutch cover assembly is fitted.

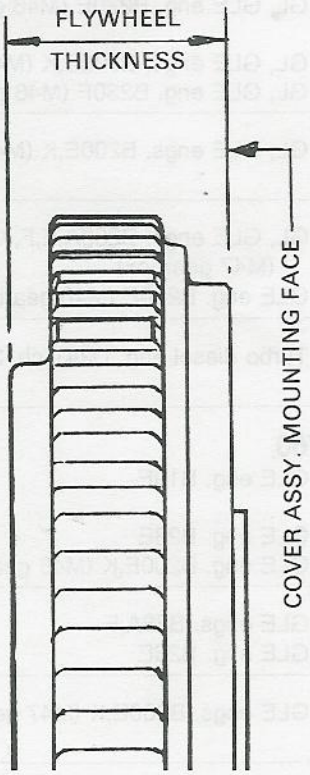

ZASTAVA - see YUGOCARS